




DOVERMULSE H1300

Polyisobutylene succinic anhydride

Dovermulse H1300 is a polyisobutylene succinic anhydride prepared from ~1300 MWT high reactive PIB and maleic anhydride, via the thermal route. It is available in undiluted as well as diluted formulations. **PIBSA** can be used as an emulsifier, dispersant, rust and wear inhibitor and chemical intermediate.

PIBSA based on other molecular weights PIB may also be offered.

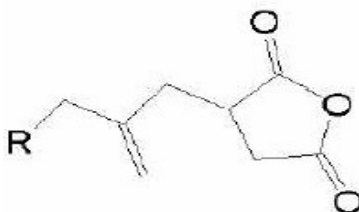

CAS Number: 67762-77-0

TYPICAL PROPERTIES

Property	Typical Result
Physical Form	Amber liquid
SAP #	75
Acid Value, mgKOH/g	42
Hydrolysis, %	<2
Viscosity @ 100°C, cSt	1125
Specific Gravity @ 15.6°C	0.920

The information contained on this data sheet is believed to be reliable. Since the conditions of application and use of our products are beyond our control, no warranty is expressed or implied regarding accuracy of the information, the results obtained from the use of the product, or that such use will not infringe on any patent. This information is furnished with the express condition that you will conduct your own tests to determine the suitability of the product for your particular use. (070212)

LGP-11®, LUBE-BOOSTER®, MAYCO®, PAROIL®, SUL-PERM®, SYN-CHEK®, SYNKAD®, CHLOREZ®, CHLOROWAX 40®, CHLOROWAX 50®, DOVERNOX®, DOVERPHOS®, DOVERPHOS HIPURE®, and DOVERPHOS S-9228® are federally registered trademarks of Dover Chemical Corporation.

